



Hypercharge Halo™

Level 2 Charging Station



Hypercharge Halo™

Features





Hypercharge Halo™

Specifications

Supply Voltage	208-240V
Current	16-48A
Output Power	3.3kW-11.5kW
Operating Temperature	-30°C - 50°C (-22°F - 122°F)
Operating Humidity Max.	95%
Operating Altitude Max.	≤ 2000 m (≤ 6561 ft)
Connector Type	SAE J1772 or J3400 (NACS)
Charging Cable	18 ft (5.5 m) Standard, 25 ft (7.6 m) Optional
Network Interface	Wi-Fi
Protocol	OCPP 1.6J
Activation Methods	Hypercharge Mobile App; RFID; Eevion™
Ingress Protection	IP65 (Dust-tight and water-resistant)
Impact Protection	IK08 (High resistance to mechanical impact)
CCID	CCID20
Built-in Protections	Overcurrent, Undervoltage, Overvoltage, Residual Current, Surge Protection, Short-Circuit, Overtemperature, Ground Fault, Current Leakage
Electrical Safety	UL 2594, UL 2231-1/-2
Regulatory Approvals	cETL, Industry Canada, FCC
Unit Dimensions	9.8" x 14.2" x 5.1" (25 cm x 36 cm x 13 cm)
Packaging Dimensions	13.2" x 19.3" x 10.4" (33.5 cm x 49 cm x 26.5 cm)
Net Weight	18.1 lbs (8.2 kg)
Gross Weight	20.3 lbs (9.2 kg)



Hypercharge Halo™

Variations and Mounting Options



J1772





NACS



Back-to-Back Pedestal

Dimensions

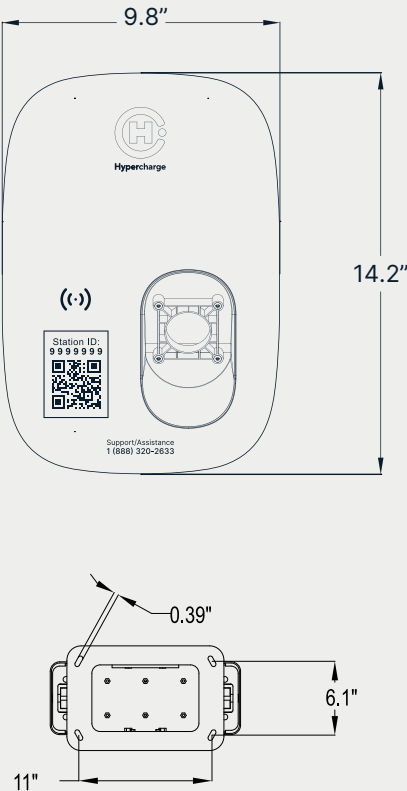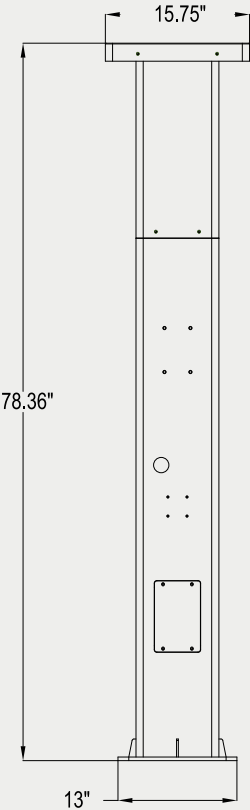

Specifications are subject to change without notice.



hypercharge.com