Hypercharge

home

HCH Series

Level 2 Charging Station

sales@hypercharge.com | +1 (866) 764-5433 | www.hypercharge.com

Hypercharge Home (HCH Series)

Features




Hypercharge Home (HCH Series)

Specifications

POWER		
Input Rating	208~240V AC	
Output Current & Power	9.6KW (40A)	11.5 kW (48A)
Power Wiring	L1 / L2 / GND	
Input Cord	NEMA14-50	Hardwired
Mains frequency	50 / 60 Hz	
Connector Type	SAE J1772 Type1 / SAE J3400 NACS (Optional), 25ft	
Ground Fault Detection	CCID 20	
Protection	UVP, OVP, RCD (CCID 20), SPD, Ground Fault Protection, OCP, OTP, Control Pilot Fault Protection	
USER INTERFACE		
Status Indication	LED indication	
User Interface	APP	
Connectivity	Bluetooth, Wi-Fi (2.4G), Ethernet（Optional）	
User Authentication	Plug & Charge, OCPP1.6J, APP, RFID (Optional)	
Software Update	OTA	
CERTIFICATION & STANDARDS		
Safety & Compliance	UL991, UL1998, UL2231, UL2594	
Certification	ETL / FCC / Energy Star	
Warranty	2 Year + 1Year Extension Warranty	
GENERAL		
Color	White	
Enclosure Rating	NEMA4 (IP65), IK08	
Operating Altitude	＜6561ft (2000m)	
Operating Temperature	−22°F ~ +122°F (−30°C ~ +50°C)	
Storage Temperature	−40°F ~ +185°F (−40°C ~ +85°C)	
Operating Humidity	5~95%	
Mounting	Wall mount	
Product Dimensions	8.66″ x 8.66″ x 3.82″ (220mm×220mm×97mm)	

Dimensions

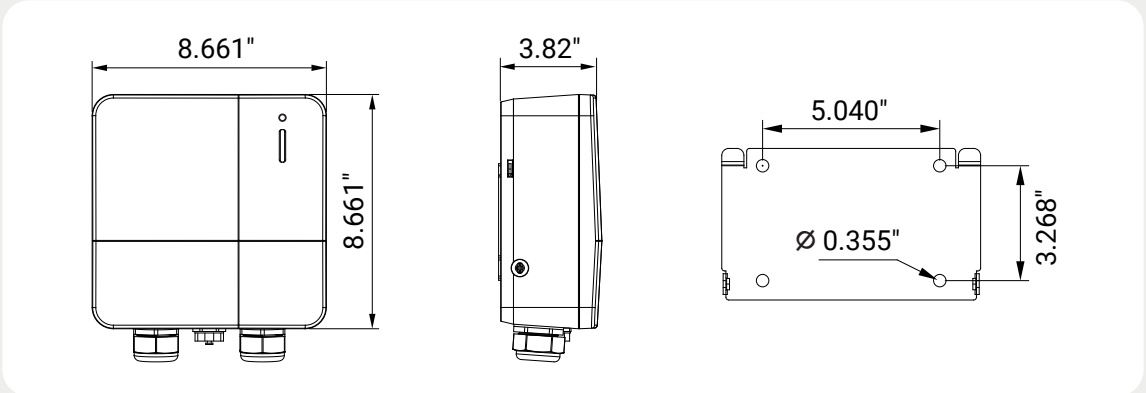



hypercharge.com