




Alpitronic HYC200

DC Fast Charging Station



Alpitronic HYC200

Features

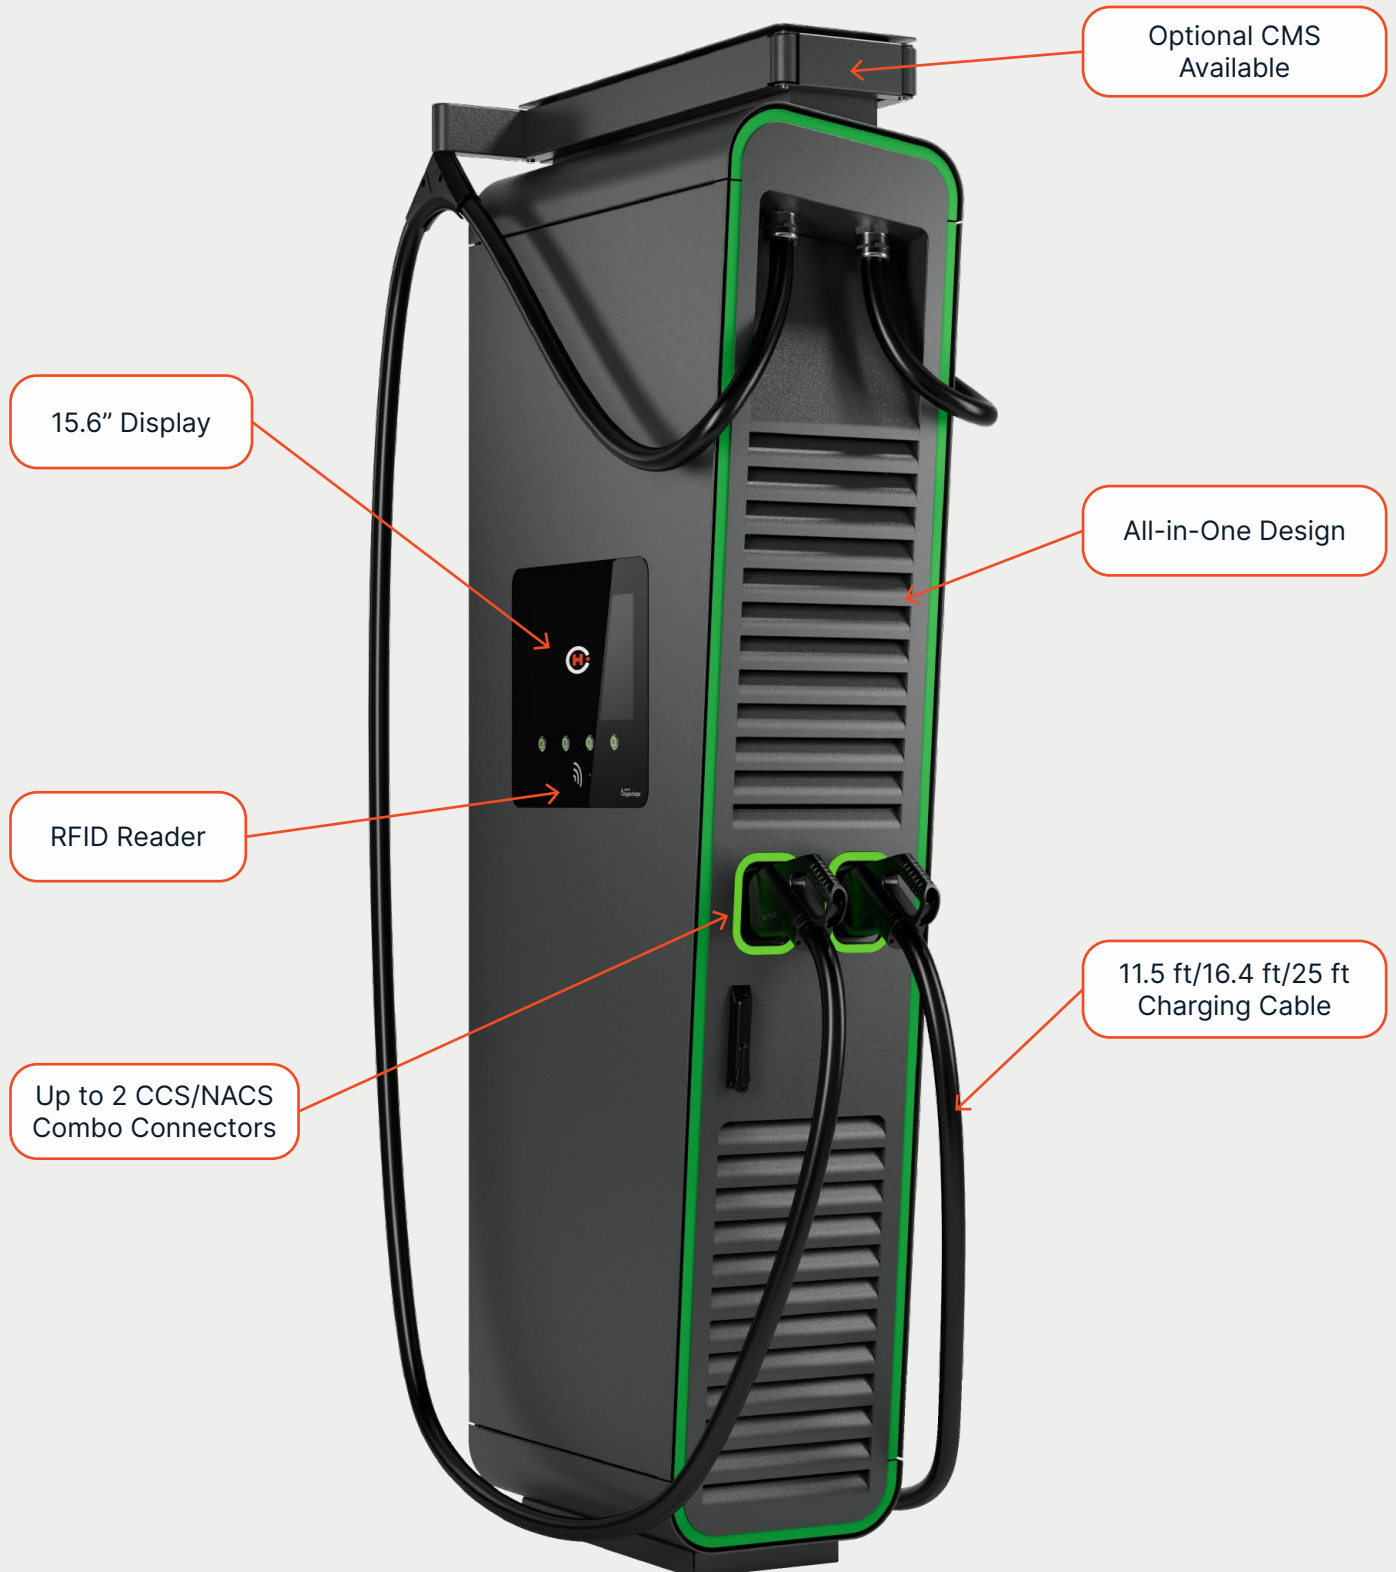



Alpitronic HYC200

Specifications

Charging Interfaces

Connection options	CCS1, J3400 (NACS), CHAdeMO
Cable lengths	11.5 ft (3.5 m), 16.4 ft (5 m), 25 ft (7.5 m)
RFID system	ISO/IEC 14443A/B, ISO/IEC 15693, NFC
Network connections	Dual SIM, 4G LTE Modems 10/100 Base-T Ethernet
Energy management	Configurable static power limit, Dynamic Power limit via OCPP/Modbus
Network communications protocol	Open Charge Point Protocol (OCPP) 1.6 and 2.0.1 Modbus, API
Vehicle communications protocol	DIN 70121, ISO 15118, Autocharge, Plug and Charge, CHAdeMO 1.2

Electrical

AC nominal voltage (RMS)	480 V \pm 10%
AC nominal input current (RMS)	240 A
Input connection	3-Phase: L1, L2, L3, GND (no neutral)
Frequency	60 Hz
Power factor	> 0.99 at full load
THDi (Total harmonic distortion)	< 5% at full load
Conversion efficiency	up to 97.5% at full load
SCCR	65 kA
Surge protection	Type 1, In 20 kA, I _{max} 50 kA
Standby power consumption	43 W
DC output	100 kW (one Power-Stack), max. 300 A 200 kW (two Power-Stacks), max. 600 A
Output voltage	150 - 1000 VDC



Alpitronic HYC200

Specifications

General

Operating temperature	-30°C up to +55°C (-22°F to 131°F)
Storage/transport temperature	-40°C to 70°C (-40°F to 158°F)
Altitude	<4,000 m (< 13,000 ft)
Humidity (in operation, storage)	Up to 95% non-condensing
Enclosure type	NEMA 3R (IP54) Indoor/Outdoor
Impact resistance (IEC 62262)	IK10
Noise emission	< 52 dBA
Dimensions (H x W x D)	86 x 16 x 26 in (2185 x 420 x 663 mm)
Weight	717 lbs up to 1019 lbs (325 kg up to 462 kg)
Accessibility	Meets ADA requirements for height and reach
User interface	15.6" display, 4 buttons, RGB connector status
Multilingual system	GUI in 27 languages
Remote management	Access control, configuration, diagnostics, software updates

Configuration Options

Branding	Options for custom colors (powder coating), custom vinyl
CMS (Cable Management System)	Metal swing arm keeps 16.4 ft (5 m) off the ground
Payment system	Credit card reader optional (Payter/Nayax), EMV Chip, Tap to Pay

Compliance and Safety

NRTL	UL 2202, UL 2231-1, UL 2231-2 CSA C22.2 No. 346.22, No. 281.1-12, No. 281.2-12 File No. E515867
Metering	CTEP No. 5966-24
EMC	FCC 47CFR Part 15B (Class A)
Electrical safety	NEC (NFPA 70) Article 625



hypercharge.com